

PRODUCT INSTRUCTION

7" Halo Ring Kit


BEFORE USING

Thank you for using our company's Higlow products. Before installing and using this product, please read the instructions carefully to ensure that you fully understand the instructions to avoid unnecessary damage. Before unpacking and using, please check whether the product has caused damage during transportation. If there is damage, please immediately think about our after-sales feedback.

PRODUCT INFORMATIONS

▶ 7" HALO RING


Power: 7W
Color: Chasing
Voltage: 12V
Rating: IP67
Type: 5050SMD Chasing
Size: 7"

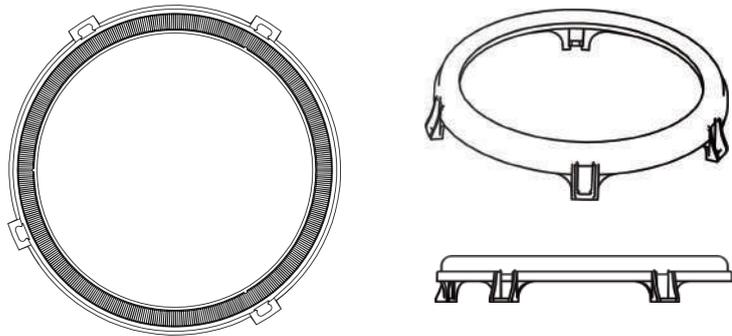


MOUNTING INSTRUCTION

▶ ACCESSORIES


Input Voltage	12V DC (9~24V)	Controller Maximum Load	12A (3A per zone, 4 zones total)
----------------------	-----------------------	--------------------------------	--

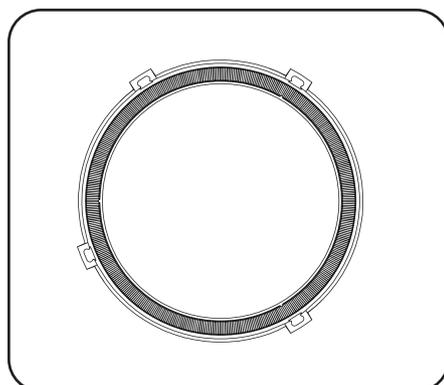

Halo ring X 2

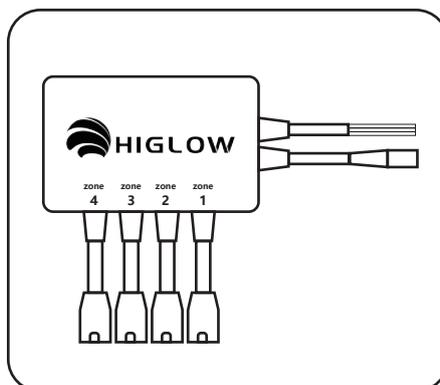

Higlow 4 zones controller X 1

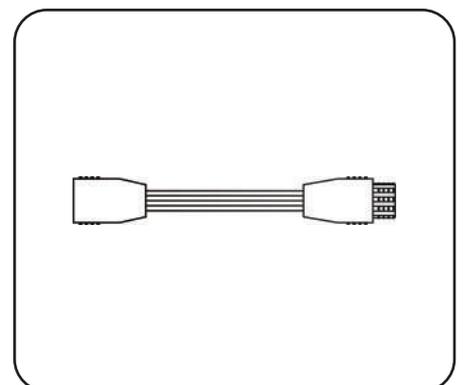


100" extension wire X 1
145" extension wire X 1

► MOUNTING STEPS

First, please make sure your phone has downloaded and installed the Higlow APP.

Step 1 Test components before installation Connect the controller to the switch, connect the 7" halo rings to the controller, and then connect the switch harness to the 12V power supply. Press the controller switch button → open the app → pair the bluetooth → test the halo rings.

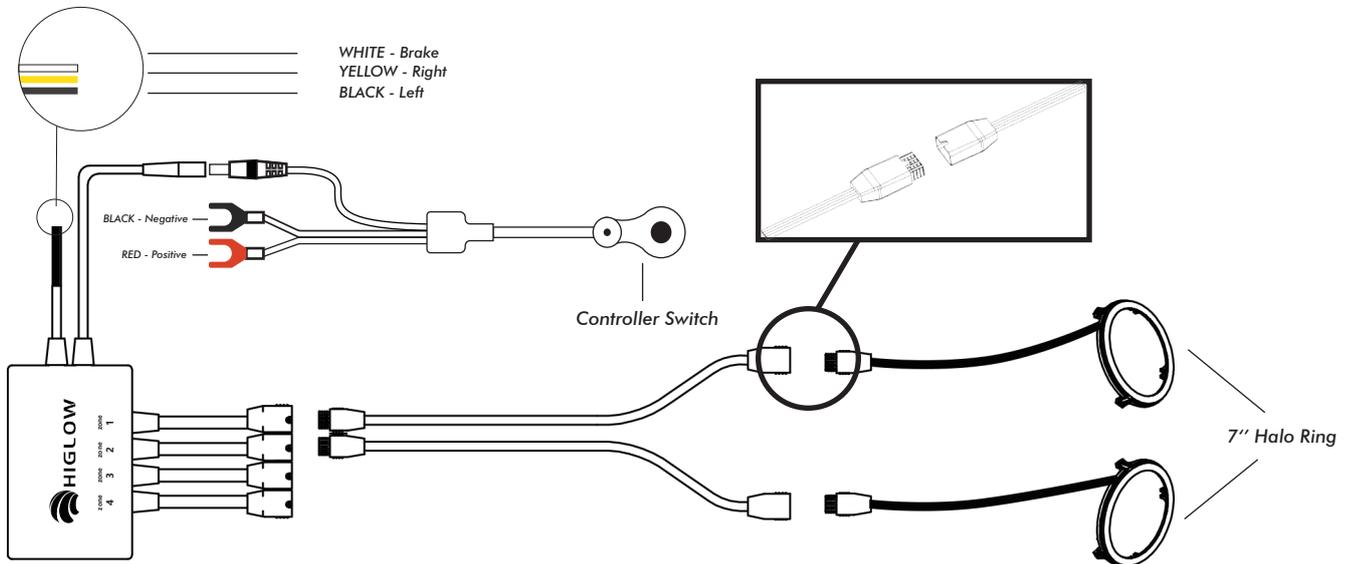

Step 2 Controller installation Place the controller around the main driver's seat is suggested. Connect the driving, braking, and steering wires on the controller to the corresponding automobile wiring harness assembly. Pass the switch wires through the engine compartment then connect with the positive and negative of battery. (Note: This step should be performed by relevant professionals).

Step 3 Extensive wire installation Take one 100" and one 145" extension wires to connect to the 2 ports of the controller. The 100" extension wire pass through the left side of the engine compartment to connect zone 1 and 145" extension wire from the right to connect zone 2.

Step 4 Install the halo ring Remove the headlights > embed the halo rings to the headlights and make sure they fit in perfectly > connect the halo rings with the extension wires > install the headlight to original place.

