

# PRODUCT INSTRUCTION

## Interior Ambient Kit


### BEFORE USING

Thank you for using our company's Higlow products. Before installing and using this product, please read the instructions carefully to ensure that you fully understand the instructions to avoid unnecessary damage. Before unpacking and using, please check whether the product has caused damage during transportation. If there is damage, please immediately think about our after-sales feedback.

### PRODUCTS INFORMATIONS

#### ► FLEXIBLE LIGHT STRIP


**Certification** RoHS  
**Power** 1.5W  
**Color** Changeable  
**Voltage** 12V  
**Rating** IP67 LED  
**Type** 5050SMD RGB W  
**Size** 12"

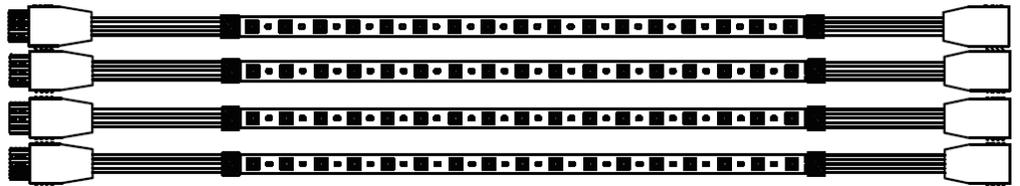


### MOUNTING INSTRUCTION

#### ► ACCESSORIES


<b>Input Voltage</b>	<b>12V DC (9~24V)</b>	<b>Controller Maximum Load</b>	<b>12A</b> (3A per zone, 4 zones total)
----------------------	-----------------------	--------------------------------	--

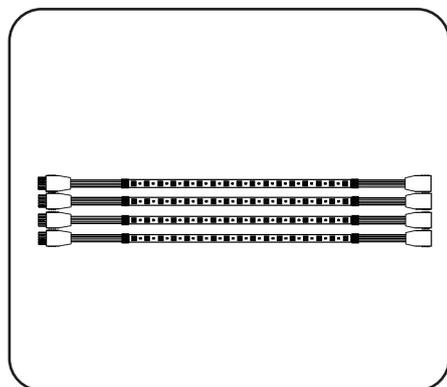

12" flexible light strip X 4

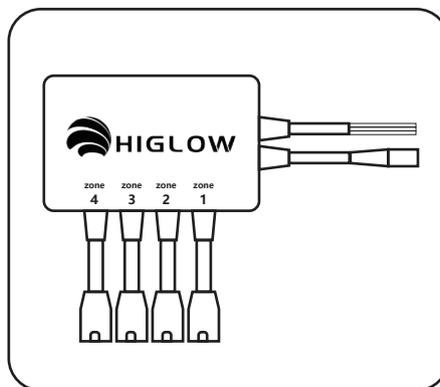

Higlow 4 zones controller X 1

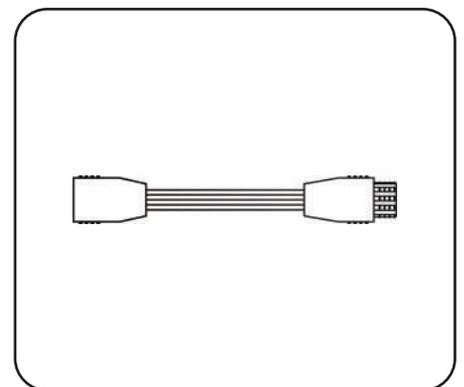


36" extension wire X 4

## ► MOUNTING STEPS

First, please make sure your phone has downloaded and installed the Higlow APP.

**Step 1 Test components before installation** Connect the controller to the switch, connect the flexible light strips to the controller, and then connect the switch harness to the 12V power supply. Press the controller switch button, open the mobile Higlow APP, connect Bluetooth, and then test all the flexible light strips.

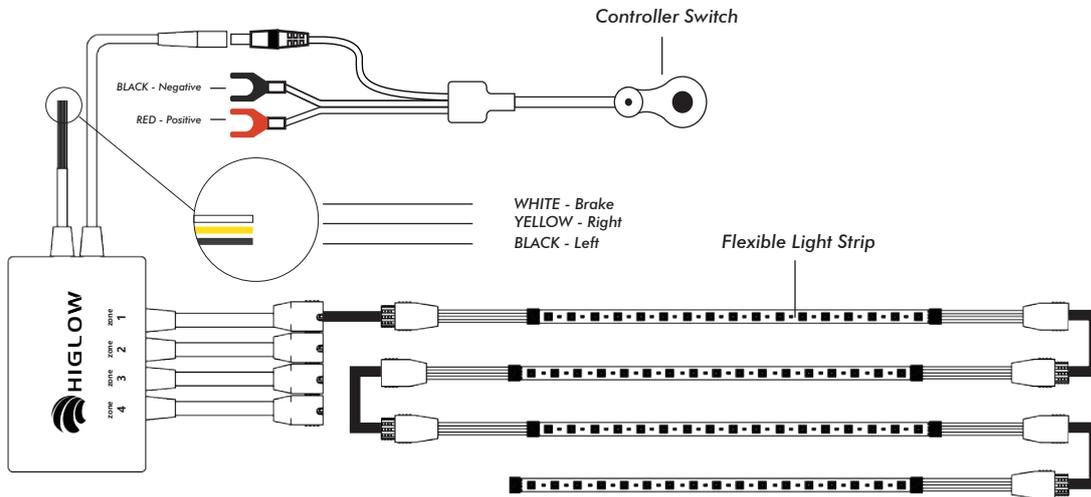

**Step 2 Controller installation** Place the controller around the main driver's seat is suggested. Connect the driving, braking, and steering wires on the controller to the corresponding automobile wiring harness assembly. Pass the switch wires through the engine compartment then connect with the positive and negative of battery. (Note: This step should be performed by relevant professionals).

**Step 3 Extensive wires and interior ambient lights installation** Take one 36" extension wire and four 12" flexible light strips connect with the controller as the picture shown.

